



ELITE SURGENTS

PATIENT CARE EQUIPMENTS




I.C.C.U & I.C.U BEDS



Contact- +91 7068840635,8112455636

Email- elitesurgents0010@gmail.com

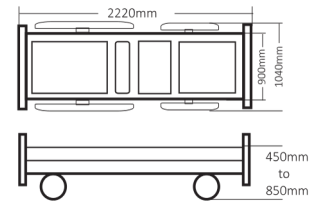

4 Motors	5 Function	 BACK REST UPWARD 75°	 FOOT REST UPWARD 45°	 TILT 12° TOWARD FOOT	 TILT 12° TOWARD HEAD	 HEIGHT ADJUSTABLE
--------------------	----------------------	--------------------------	--------------------------	--------------------------	--------------------------	-----------------------



- All Function operated by Four motors,
- Head & Foot Molded penal with MS Top.
- Tuck Down ABS Railing with angle Indicator.
- S.S. Telescopic rod can be fitted at four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Diagonally lockable Non rusting castor wheels.
- Epoxy powder finished process in 11 tank hot process


DIMENSIONS:

- Angle of back section 0-70°(±5).
- Angle of leg section 0-30°(±5).
- Angle of Trendelenburg and reverse tredellenburg 0-12°(±3).
- Adjustable height 450-850mm.

OPTIONAL

- Collapsible Railing.
- Four section leather foam mattress
- Central & directional locking system.
- Attendant control panel.

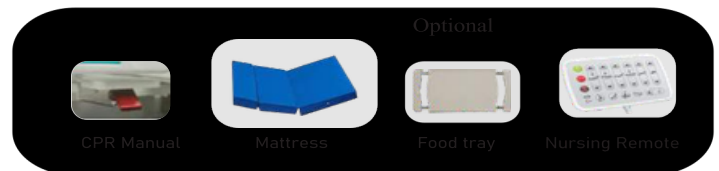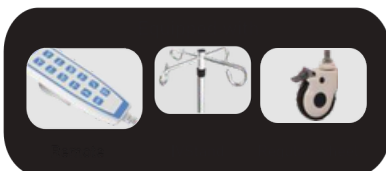

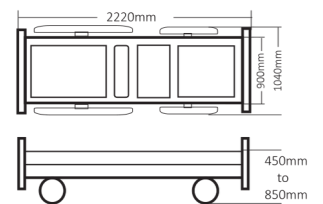

3 Motors
5 Function
BACK REST UPWARD 75°
TILT 12° TOWARD FOOT
TILT 12° TOWARD HEAD
HEIGHT ADJUSTABLE
By Manual Crank
FOOT REST UPWARD 45°

- All Function operated by Three motors one Crank Mechanically.
- Head & Foot Molded penal with MS Top.
- Tuck Down ABS Railing with angle Indicator.
- S.S. Telescopic rod can be fitted at four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Diagonally lockable Non rusting castor wheels.
- Epoxy powder finished process in 11 tank hot process

DIMENSIONS:

- Angle of back section 0-70°(±5).
- Angle of leg section 0-30°(±5).
- Angle of Trendelenburg and reverse tredellenburg 0-12°(±3).
- Adjustable height 450-850mm.

OPTIONAL

- Collapsible Railing.
- Four section leather foam mattress
- Central & directional locking system.
- Attendant control panel.

Equipped with

Remote IV Stand Regular wheel

Optional


CPR Manual Mattress Food tray Nursing Remote



THREE MOTOR THREE FUNCTION

3 Motors	3 Function	BACK REST UPWARD 75°	FOOT REST UPWARD 45°	HEIGHT ADJUSTABLE	By Manual Crank	FOOT REST UPWARD 45°
--------------------	----------------------	----------------------	----------------------	-------------------	-----------------	----------------------

OPTIONAL

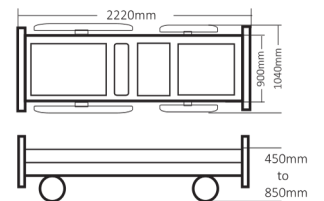

THREE MOTOR FOUR FUNCTION

3 Motors	4 Function	BACK REST UPWARD 75°	TILT 12° TOWARD FOOT	TILT 12° TOWARD HEAD	HEIGHT ADJUSTABLE
--------------------	----------------------	----------------------	----------------------	----------------------	-------------------

- All Function operated by three motor .
 - Head & Foot Molded pannel with MS Top.
 - Collapsiable Railing.
 - S.S. Telescopic rod can be fitted at four location.
 - Patient weight bearing capacity 250 kg.
 - Urine hook holder.
 - Epoxy powder finished 11 tank hot process treated ,
- DIMENSIONS:**
- Angle of back section 0-70°(±5).
 - Angle of leg section 0-30°(±5).
 - Angle of Trendelenburg and reverse tredellenburg 0-12°(±3).
 - Adjustable height 450-850mm.

OPTIONAL


- Tuck Down ABS Railing.
- Four section leather foam mattress
- Central & directional locking system.

Equipped with

Remote	IV Stand	Regular wheel

Optional

ABS Side Railing	Mattress	Food tray	Nursing Remote

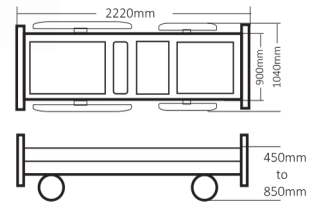

5 Function 2 Motors HEIGHT ADJUSTABLE BACK REST UPWARD 75° By Manual Crank TILT 12° TOWARD HEAD FOOT REST UPWARD 45° TILT 12° TOWARD FOOT


- All Function operated by two motor & two Crank Mechanically.
- Head & Foot Molded pannel with MS Top.
- Collapsible Railing.
- S.S. Telescopic rod can be fitted at four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Epoxy powder finished 11 tank hot process treated,


DIMENSIONS

- Angle of back section 0-70°(±5).
- Angle of leg section 0-30°(±5).
- Angle of Trendelenburg and reverse tredellenburg 0 12°(±3).
- Adjustable height 450-850mm.

OPTIONAL

- Tuck Down ABS Railing.
- Four section leather foam mattress
- Central & directional locking system.

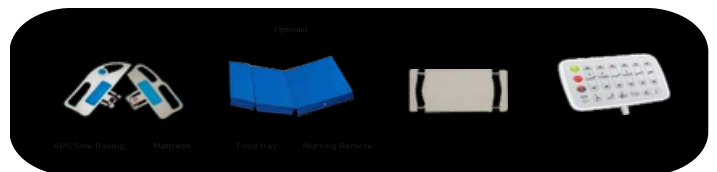

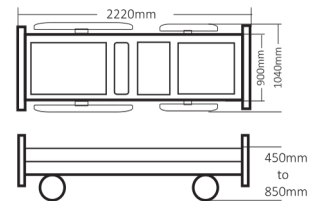

5 Function 2 Motors HEIGHT ADJUSTABLE BACK REST UPWARD 75° By Manual Crank TILT 12° TOWARD HEAD FOOT REST UPWARD 45° TILT 12° TOWARD FOOT


- All Function operated by two motor & two Crank Mechanically.
- Head & Foot Molded pannel with MS Top.
- Tuck Down ABS Railing.
- S.S. Telescopic rod can be fitted at four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Epoxy powder finished 11 tank hot process treated,

DIMENSIONS:

- Angle of back section 0-70°(±5).
- Angle of leg section 0-30°(±5).
- Angle of Trendelenburg and reverse trendellenburg 0-12°(±3).
- Adjustable height 450-850mm.

OPTIONAL

- Collapsible Railing.
- Four section leather foam mattress
- Central & directional locking system.

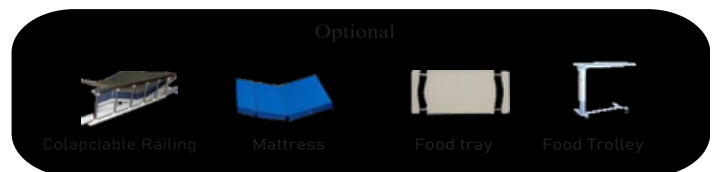



DIMENSIONS:

- Head elevation of 0 - 70 degrees
- Knee elevation of 0 - 45 degrees.
- Trendlenburg/Reverse Trend of 0 - 15 degrees
- Area of sleep surface: 35" x 80"
- High Position floor to top of pan deck: 30" or more.
- Low position floor to top of pan deck: 19" or less



- High density sponge.
- 4 section sponge mattress.



5" Castors,
2 with brakes



Two sections
I.V. Pole
(4 hooks/2 hooks)




Also available with
elevation
Gauges indicating
degree side railing



Also available in wooden colour

WARRANTY :

- Three years on all parts and services.
- Lifetime warranty on all frame welds.
- Spare parts will be available for 5 years from the date of discontinuation of the product.

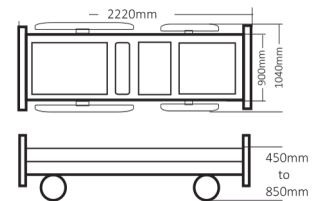

5
Function

All By
Manual
Crank

BACK REST
UPWARD 75°

FOOT REST
UPWARD 45°

TILT 12°
TOWARD FOOT

TILT 12°
TOWARD HEAD

HEIGHT
ADJUSTABLE



- All Function operated by Four Crank Mechanically.
- Head & Foot Molded panel with MS Top.
- Tuck Down ABS Railing.
- S.S. Telescopic rod can be fitted at four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Epoxy powder finished 11 tank hot process treated,

DIMENSIONS:

- Angle of back section 0-70°(±5).
- Angle of leg section 0-30°(±5).
- Angle of Trendelenburg and reverse trendellenburg 0 12°(±3).
- Adjustable height 450-850mm.


OPTIONAL

- Collapsible Railing.
- Four section leather foam mattress
- Central & directional locking system.

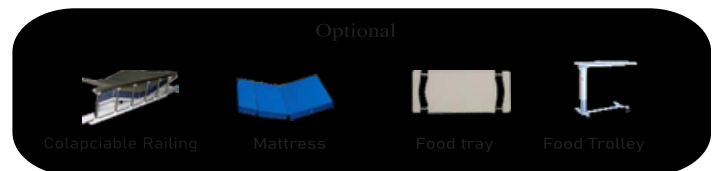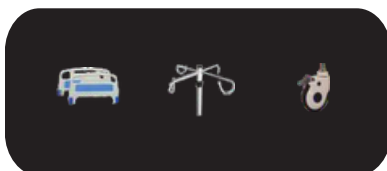

EXCELLENT BED- HI-LO I.C.C.U BED

APPROXIMATE SIZE : L 2220 X W 890 X H 490 - 730 MM

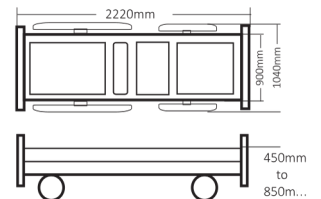



- All Function operated by Three Crank Mechanically.
- Head & Foot Molded pannel with MS Top.
- Tuck Down ABS Railing.
- S.S. Telescopic rod can be fitted at four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Epoxy powder finished process in 11 tank hot process


DIMENSIONS:

- Angle of back section 0-70°(±5).
- Angle of leg section 0-30°(±5).
- Angle of Trendelenburg and reverse tredellenburg 0-12°(±3).
- Adjustable height 450-850mm.

OPTIONAL

- Collapsible Railing.
- Four section leather foam mattress
- Central & directional locking system.

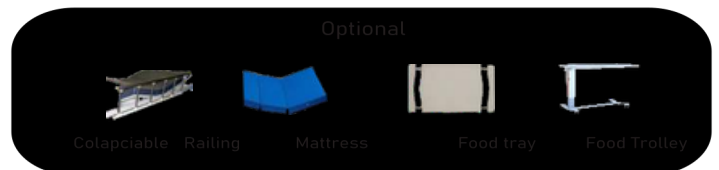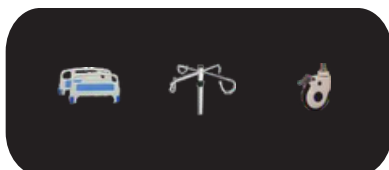

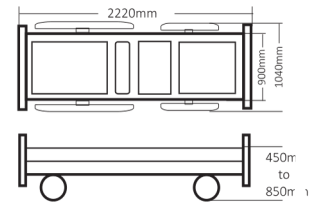

3 Crank

- BACK REST UPWARD 75°
- FOOT REST UPWARD 45°
- TILT 12° TOWARD HEAD
- TILT 12° TOWARD FOOT

- All Function operated by Three Crank Mechanically.
- Head & Foot Molded pannel with MS Top.
- Collapsiable Ralling. Tuck Down ABS Railing.
- S.S. Telescopic rod can be fitted at four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Epoxy powder finished process in 11 tank hot process

DIMENSIONS:

- Angle of back section 0-70°(±5).
- Angle of leg section 0-30°(±5).
- Angle of Trendelenburg and reverse tredellenburg 0-12°(±3).

OPTIONAL

- Tuck Down ABS Railing.
- Four section leather foam mattress
- Central & directional locking system.

Equipped with

ABS BOWS IV Stand Regular wheel

Optional

ABS Railing Mattress Food tray Food Trolley

ELITE SURGENTS

WARD CARE BEDS

FOWLER & SEMI-FOWLER



Contact- +91 7068840635,8112455636

Email- elitesurgents0010@gmail.com

ELITE SURGENTS

BE - 8170 (TE)


- All Function operated by Two motors & pneumatically.
- Head & Foot ABS Molded panel with MS Top.
- Backrest, Kneerest electrically Trendelenberg pneumatically
- Tuck Down ABS Railing.
- Saline arrangement on four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Epoxy powder finished pre treated by 11 tank hot process

DIMENSIONS:

- Angle of back section 0-70°(±5).
- Angle of leg section 0-30°(±5).
- Angle of Trendelenburg and reverse trendelenburg 0-12°(±3).



TWO MOTORS FOUR FUNCTION BED



BE - 8162 (TE)



- All Function operated by Two motors & pneumatically.
- Head & Foot Molded panel with MS Top.
- Backrest, Kneerest electrically Trendelenburg pneumatically
- Tuck Down ABS Railing.
- Saline arrangement on four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Epoxy powder finished pretreated by 11 tank hot process

DIMENSIONS:

- Angle of back section 0-70°(±5).
- Angle of leg section 0-30°(±5).
- Angle of Trendelenburg and reverse trendelenburg 0-12°(±3).



TWO MOTORS FOUR FUNCTION BED

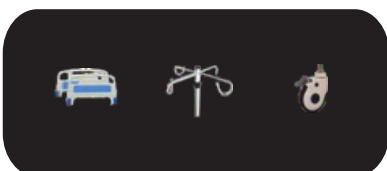

ELITE SURGENTS

BE - 8150 (E)

TWO MOTORS FOWLER ELECTRIC BED

WARD CARE BED - DELUXE (FIX HEIGHT, FOWLER POSITION)


- All Function operated by Two motors .
- Head & Foot ABS Molded panel with MS Top.
- Backrest ,Kneerest electrically .
- Tuck Down ABS Railing.
- Saline arrangement on four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Epoxy powder finished pre treated by 11 tank hot process

DIMENSIONS:

- Angle of back section 0-70°(±5).
- Angle of leg section 0-30°(±5).

OPTIONAL

- Detachable Collapsible Railing
- Four section leather foam mattress
- Non rusting castor two with breaks & two without breaks.

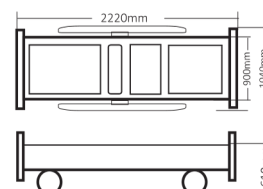


BE - 8120

TWO FUNCTION FOWLER BED (ABS)

- All Function operated by Screw mechanism..
- Head & Foot ABS Molded panel with MS Top.
- Four section perforated MS top.
- Frame work made up of heavy gauge CRCA tubes
- Saline arrangement on four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Epoxy powder finished pre treated 11 tank hot process

DIMENSIONS

- Angle of back section 0-70°(±5).
- Angle of leg section 0-30°(±5).

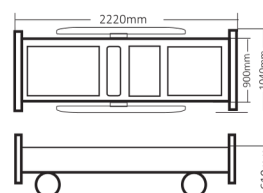

ELITE SURGENTS

BE - 8116

TWO FUNCTION FOWLER BED (SEMI DELUX)


- All Function backrest & Kneerest by Screw mechanism..
- Detachable SS head & foot bows with laminated panel.
- Four section perforated MS top.
- Frame work made up of heavy gauge CRCA tubes
- Saline arrangement on four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Epoxy powder finished pre treated 11 tank hot process

DIMENSIONS:

- Angle of back section 0-70°(±5).
- Angle of leg section 0-30°(±5).

OPTIONAL

- Detachable Collapsible Railing
- Four section leather foam mattress
- Non rusting castor two with breaks & two without breaks.

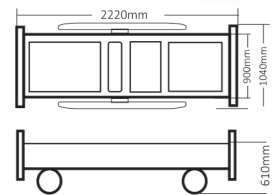

BE - 8115

TWO FUNCTION FOWLER BED (STANDARD)


- All Function backrest & Kneerest by Screw mechanism..
- Tubular head & Foot Bows of unequal height.
- Four section perforated MS top.
- Frame work made up of heavy gauge CRCA tubes
- Saline arrangement on four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Epoxy powder finished pre treated 11 tank hot process

DIMENSIONS:

- Angle of back section 0-70°(±5).
- Angle of leg section 0-30°(±5).

OPTIONAL

- Detachable Collapsible Railing
- Four section leather foam mattress
- Non rusting castor two with breaks & two without breaks.

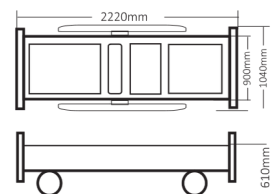

Optional



Drop Railing



collapsible Railing



Collapsible regular



I.V Stand



Wheels



Mattress



Food Tray

ELITE SURGENTS

BE - 6138

Semi Fowler BED Electric(ABS)

- Backrest operated electrically by remote .
- ABS head & foot panel with corner buffer.
- Two section perforated MS top.
- Frame work made upof heavy gauge CRCA tubes
- Saline arrangement on four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Epoxy powder finished pre treated 11 tank hot process

DIMENSIONS:

- Angle of back section 0-70°(±5).

OPTIONAL

- Detachable Collapsible Railing
- Two section leather foam mattress
- Non rusting castor two with breaks & two without breaks.



BE - 6126

SEMI FOWLER BED MANUAL (ABS)

- Backrest operated by Screw mechanism..
- ABS head & foot panel with corner buffer.
- Two section perforated MS top.
- Frame work made upof heavy gauge CRCA tubes
- Saline arrangement on four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Epoxy powder finished pre treated 11 tank hot process

DIMENSIONS :

- Angle of back section 0-70°(±5).

OPTIONAL

- Detachable Collapsible Railing
- Two section leather foam mattress
- Non rusting castor two with breaks & two without breaks.




Optional



Drop Railing



collapsible Railing



Collapsible regular



I.V Stand



Wheels



Mattress



Food Tray

ELITE SURGENTS

BE - 6114D

SEMI FOWLER BED(DELUX)

- Backrest operated by Screw mechanism..
- SS Tubular pipe with laminated panel.
- Two section perforated MS top.
- Frame work made up of heavy gauge CRCA tubes
- Saline arrangement on four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Epoxy powder finished pre treated 11 tank hot process

DIMENSIONS:

- Angle of back section 0-70°(±5).

OPTIONAL

- Detachable Collapsible Railing
- Two section leather foam mattress
- Non rusting castor two with breaks & two without breaks.



BE - 6113

SEMI FOWLER BED(DELUX)

- Backrest operated by Screw mechanism..
- Tubular head & foot bows.
- Two section perforated MS top.
- Frame work made up of heavy gauge CRCA tubes
- Saline arrangement on four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Epoxy powder finished pre treated 11 tank hot process

DIMENSIONS:

- Angle of back section 0-70°(±5).

OPTIONAL


- Detachable Collapsible Railing
- Two section leather foam mattress
- Non rusting castor two with breaks & two without breaks.



Drop Railing



collapsible Railing



Collapsible regular




I.V Stand



Wheels



Mattress



Food Tray

Optional

ELITE SURGENTS

BE - 6112

SEMI FOWLER BED (SEMI DELUX)

- Backrest operated by Screw mechanism..
- Laminated tubular head & foot bows.
- Two section perforated MS top.
- Frame work made up of heavy gauge CRCA tubes
- Saline arrangement on four location.
- Urine hook holder.
- Epoxy powder finished pre treated 11 tank hot process

DIMENSIONS:

- Angle of back section 0-70°(±5).

OPTIONAL

- Detachable Collapsible Railing
- Two section leather foam mattress
- Castor two with breaks & two without breaks.



BE - 6110

SEMI FOWLER BED (REGULAR)

- Backrest operated by Screw mechanism..
- Tubular head & foot bows.
- Two section perforated MS top.
- Frame work made up of heavy gauge CRCA tubes
- Saline arrangement on four location.
- Patient weight bearing capacity 250 kg.
- Urine hook holder.
- Epoxy powder finished pre treated 11 tank hot process

DIMENSIONS:

- Angle of back section 0-70°(±5).

OPTIONAL

- Detachable Collapsible Railing
- Two section leather foam mattress
- Castor two with breaks & two without breaks.




Optional



Drop Railing



collapsible Railing



Collapsible regular



I.V Stand



Wheels



Mattress



Food Tray

ELITE SURGENTS

BE - 6396

WARD BED (GENERAL)

- Tubular head & foot bows with verticle support.
 - Machine pressed perforated MS top.
 - Frame work made up of heavy gauge CRCA tubes
 - Saline arrangement on four location.
 - Leg fitted with PVC shoes .
 - Urine hook holder.
 - Epoxy powder finished pre treated 11 tank hot process
- OPTIONAL**
- Detachable Collapsible Railing
 - Leather foam mattress
 - Castor two with breaks & two without breaks Saline stand.



BE - 6311

Ward BED (Delux)

- Detachable SS head & foot bows laminated panel.
 - Machine pressed perforated MS top.
 - Frame work made up of heavy gauge CRCA tubes
 - Saline arrangement on four location.
 - Leg fitted with PVC shoes .
 - Urine hook holder.
 - Epoxy powder finished pre treated 11 tank hot process
- OPTIONAL**
- Detachable Collapsible Railing
 - Leather foam mattress
 - Castor two with breaks & two without breaks Saline stand.



BE - 6310

Ward BED (Delux)


- Detachable head & foot bows t.
 - Machine pressed perforated MS top.
 - Frame work made up of heavy gauge CRCA tubes
 - Saline arrangement on four location.
 - Leg fitted with PVC shoes .
 - Urine hook holder.
 - Epoxy powder finished pre treated 11 tank hot process
- OPTIONAL:**
- Detachable Collapsible Railing
 - Leather foam mattress
 - Castor two with breaks & two without breaks Saline stand.



Drop Railing



collapsible Railing



Collapsible regular



I.V Stand



Wheels



Mattress



Food Tray

ELITE SURGENTS

ACCESSORIES




COLLAPSIBLE SIDE RAILING



DROP SIDE RAILING



COLLAPSIBLE SIDE RAILING

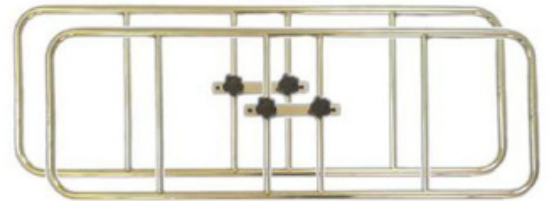

DROP SIDE RAILING



ABS SIDE RAILING




ABS SIDE RAILING



ICU MATTRESS



ABS BOWS

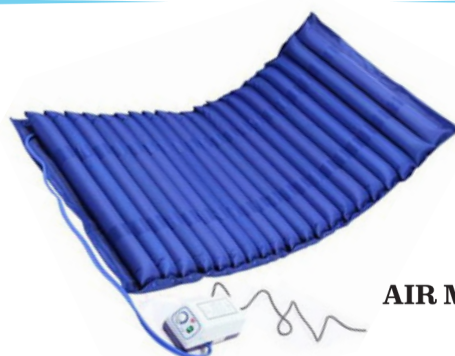

AIR MATTRESS

ELITE SURGENTS

BE - 6411

BED SIDE LOCKER

- ❑ PATIENT BED SIDE LOCKER (ABS)
- ❑ APPROXIMATE SIZE : L 480 X W 470 X H 755 MM



- Made up of ABS Non Rusting Heavy Duty
- 2 pcs towel stands
- 4 pcs oddment hooks
- Optional choose : 4 pcs 2" castors
- Optional choose : 1pc water bottle stand

BE - 6480

- ❑ APPROXIMATE SIZE : L 400 X W 400 X H 820MM
- ❑ PATIENT BED SIDE LOCKER (EXECUTIVE)

- Machine pressed CRC sheet cabinet enclosed on three sides.
- Having one drawer & one cabinet.
- Having S.S. top tray type three side borders.
- Four swivel 50mm Dia. Non rusting castor.
- Buffer at rear.
- Finish pre-treated and epoxy powder coated.



ELITE SURGENTS

BE - 6452

- ❑ PATIENT BED SIDE LOCKER –S.S. TOP WITH S.S. TRAY
- ❑ APPROXIMATE SIZE : L 400 X W 400 X H 820MM

- Machine pressed CRC sheet cabinet
- Having door with ventilation louvers
- Having S.S. Top & S.S. Tray fitted on cabinet
- Tubular Leg fitted with PVC shoes
- Finish pre-treated and epoxy powder coated.



BED SIDE LOCKER

BE - 6444

- ❑ PATIENT BED SIDE LOCKER – S.S. TOP
- ❑ Approximate Size : L 400 X W 400 X H 820mm

- Machine pressed CRC sheet cabinet
- Having door with ventilation louvers
- Having S.S. Top
- Tubular Leg fitted with PVC shoes
- Finish pre-treated and epoxy powder coated.



BE - 6442

- ❑ PATIENT BED SIDE LOCKER –S.S. TOP THREE SELVES
- ❑ Approximate Size : L 400 X W 400 X H 820mm

- Machine pressed CRC sheet cabinet
- Having three S.S. Top
- Tubular Leg fitted with PVC shoes
- Dull Hairline SSFinish



ELITE SURGENTS

BE - 6514

OVER BED TROLLEY

- ▣ CARDIAC TABLE (ADJUSTABLE BED SIDE - PNEUMATIC)
- ▣ APPROXIMATE SIZE : L 800 X W 400 X H 750-1050 MMZZ



- Movable, can adjust Top position low or high
- Rectangular frame work mounted on 2" castors
- Made of ABS and aluminum alloy
- ABS top adjustable by pneumatic gas spring



BE - 6516

- ▣ CARDIAC TABLE (ADJUSTABLE BED SIDE - GEAR HANDLE)
- ▣ APPROXIMATE SIZE : L 760MM X W 400MM X H 730 - 1090 MM

- Single section membrane pressed top with raised edges
- Rectangular frame work mounted on 2" non rusting castors
- Height adjustment by geared mechanism fitted with collapsible fix handle
- Finish pre-treated and epoxy powder coated.



ELITE SURGENTS

BE - 6570

- ❑ CARDIAC TABLE (ADJUSTABLE BED SIDE - KNOB)
- ❑ Approximate Size : L 760mm X W 400mm X H 730 - 1090 mm

- Rectangular frame work mounted on 2" castors
- ABS top with adjustable height by side knob.



OVER BED TROLLEY

BE - 6544

- ❑ CARDIAC TABLE (FIXED)
- ❑ Approximate Size : L 1050 X W 400 X H 975 mm

- Tubular frame work mounted on 2" castors.
- Fixed membrane press wooden laminated top.
- Finish pre-treated and epoxy powder coated.



BE - 609

- ❑ MAYO'S TROLLEY
- ❑ Approximate Size : L 560 X W 400 X H 760-1270 mm

- Tray made of 0.9 mm thick S.S. 304 grade sheet.
- Complete S.S. tubular frame work
- 50mm Dia. Non rusting Castors
- Finish : S.S. Frame with S.S. top.



ELITE SURGENTS

PATIENT'S REVOLVING STOOL (SS TOP)

- Four leg base with PVC stumps
- Height adjustment by machine screw from 18" x 27"
- Foot rest ring support made of MS Tube
- Finish pre-treated and epoxy powder coated.
- S.S. Frame work and S.S Top BE-6626



BE-6626



BE-6614



BE-6620



BE-6618

PATIENT'S REVOLVING STOOL (CUSHIONED TOP)

- Four leg base with S.S. Tubular frame work
- Height adjustment by machine screw from 18" x 27"
- Foot rest ring support made of S.S. Tube.



BE - 6650



BE-6642

LAB TECHNICIAN STOOL

- Height adjustable cushioned seat.
- 5 legs base on castors.
- Foot rest ring support made of S.S. Tube.



BE - 6680



BE-6690

SURGEON CHAIR

Specification :

- Pneumatic height adjustable.
- Height adjustable and swinging back rest.
- 5 legs base on castors with foot ring.
- Base fitted with 50 mm dia castors.

ELITE SURGENTS

SINGLE STEP STOOL

APPROXIMATE SIZE : L 460 X W 310 X H 150MM

- Machine pressed CRCA sheet top fitted with aluminum tread flats
- Tubular frame work Leg fitted with PVC shoes
- Finish pre treated and epoxy powder coated.
- Also available in complete S.S.



BE - 6720



BE - 6714



BE - 6724



BE - 6736

DOUBLE STEP STOOL

Approximate Size : L 460 X W 600 X H 300 mm

- Machine pressed CRCA sheet top fitted with aluminum tread flats
- Tubular frame work Leg fitted with PVC shoes
- Finish pre treated and epoxy powder coated
- Also available in complete S.S

BED SIDE STOOL

Approximate Size: L 300 X W 300 X H 510 mm

- Top made of CRCA sheet double bent
- Legs made of 25 mm x 18 G and horizontal support
- CRCA tube fitted with PVC stumps
- Finish pre treated and epoxy powder coated
- Optional (cost-extra)
- Bed Side Stool – Cushioned Top (Item code:- 6722)



BE - 6710

EXAMINATION TABLE

APPROXIMATE SIZE : L 1830 X W 610 X H 840 MM

- Machine pressed double bent CRCA sheet.
- Having top two section
- Head flap adjustment on ratchet
- Tubular frame work Leg fitted with PVC shoes.
- Provided with 50 m.m thick high.
- Density special PU foam mattress all.
- Side covered (Optional).
- Finish Pre-treated and Epoxy Powder Coated.



BE - 5011



BE - 5014

EXAMINATION CUM GYNAE TABLE

Approximate Size : L 1830 X W 610 X H 840mm

- Two section top with head section adjustable on ratchet.
- Made of CRCA sheet and pipes.
- Lithotomy leg holders with straps provided at Legend. IV stand (optional).
- Provided with 50 m.m thick high density PU foam mattress all side covered with heavy duty rexine. (optional)
- Finish Pre-treated and Epoxy Powder Coated.

ELITE SURGENTS

EXAMINATION COUCH WITH STEP STOOL

Approximate Size : L 1830 X W 610 X H820 mm

Specification :

- Upper section three drawer.
- Lower section has two separate cabinet & one center drawer.
- Having swing tray for B.P. tray near head rest.
- Supply with single step stool.
- Provided with 50 m.m thick high density special PU foam mattress all side covered with high quality leather foam.(Optional)
- Finish Pre-treated and Epoxy Powder Coated.



BE - 5026

EXAMINATION COUCH WITH U CUT

Approximate Size : L 1830 X W 610 X H820 mm

- "U" cut at the lower end with a pair of Lithotomy rods with belt.
- Upper section three drawer.
- Lower section has two separate cabinet & one center drawer.
- Having swing tray for B.P. tray near head rest.
- Supply with single step stool.
- Provided with 50 m.m thick high density special PU foam mattress all side covered with high quality leather foam.(Optional)
- Finish Pre-treated and Epoxy Powder Coated.



BE - 5028

EXAMINATION COUCH WITH BACK REST

Approximate Size : L 1830 X W 610 X H 820 mm

- Head rest adjustments on Gas Spring
- Upper section three drawer
- Lower section has two separate cabinet & one center drawer.
- Having swing tray for B.P. tray near head rest
- Supply with single step stool
- Provided with 50 mm thick high density PU foam mattress all side covered with heavy duty leather Foam.

Optional

- Finish Pre-treated and Epoxy Powder Coated



BE - 5029

ELITE SURGENTS

"C" ARM OPERATING TABLE- ELECTRIC/HYDRAULIC

Approximate Size : L 83 X W 20.5" (without side rails)

Six Section table top allow ease and comfort for surgical positions. Radio translucent top provides easy convince for x-ray procedures. Center pillar with sliding top for maximum coverage of C-Arm machine. Base & column covered with 304G Stainless steel top to ensure high durability hygiene for the operation room. Imported gas spring assisted head section leg section & backrest. Split type leg section. Memory foam mattress. Central locking Castors.

- Height Adjustable 28" X 40"
- Movements
- Hi-Low
- Trendlenberg
- Reverse Trendlenberg
- Lateral tilt/flex reflex



BE - 3002

OPERATION TABLE HYDRAULIC/ELECTRIC

Approximate Size : L 1950mm X W 530 mm

Specification:-

Five section table top gives ease for various surgical positions. Base & covered with 304G stainless steel top to ensure high durability & hygiene for the operation room. Leg section & head section inter changeable optional : Radio-translucent top provides easy.

- Height Adjustable
- Movements
- Hi-Low
- Trendlenberg
- Reverse Trendlenberg



BE - 3004

DELIVERY BED



BE - 5100



- Gynecological table construct of Stainless steel & Mild steel CRCA tubular pipe .
- All MS part are duly 9 tank process and Powder coated . Equipped with Arm support on both side ,with water proof mattress.
- Safe for upto 140 kg load Maximum load capacity 200 Kg.
- Three section top .
- Steel Tubular frame work.
- Back rest operated by pneumatic actuators manually upto 70 degree.
- Height adjustment by hydraulic movement.
- Trendelenburg adjustment pneumatic actuators manually upto 12 degree.
- Leg section can be detached for lithotomic position.
- Pair of upholstered lithotomic Crutches mounted on S.S. Rods.

Dimensions :

- Over all size of Table 870x2165
- Mattress plate form 560x1870
- Height Adjustment 610 x1010mm

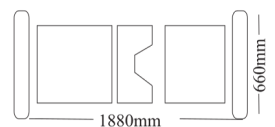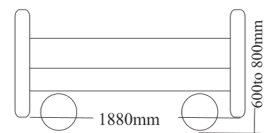

ELITE SURGENTS



LABOUR DELIVERY BED

ELECTRIC / HYDRAULIC

BE - 5100




- Tubular Frame work mounted on 125mm dia central locking castor.
- Three section top with 3 section mattress.
- Trendlenburg / Reverse Trendlenburg positions.
- Height adjustments, back section adjustment through electronic actuator system or by Hydraulic movement
- Leg end section can slide under the main section
- A pair of foam padded knee crutches with Height adjustment .
- S.S. Telescopic I.V. Road with 4 hooks
- Detachable S.S. Tray.
- ABS Head and Foot Panel.
- S.S. Grip Handles.

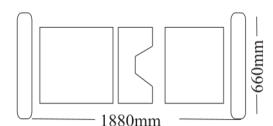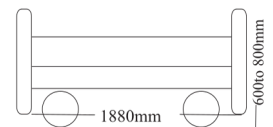

ELITE SURGENTS

DELIVERY TABLE


- Three section top.
- Back rest adjusted by ratchet mechanism.
- Leg section can be telescoped under back rest for lithotomy position.
- Detachable panels.
- Pair of upholstered lithotomy crutches mounted on S.S. Rods.
- Trendelenburg adjusted by pneumatic movement.
- 125mm Dia, non rusting castor two with break.
- Two side detachable S.S. by Rail.
- Foam mattress with leather foam water proof cover suitable for delivery bed.
- Finish pretested in 11 tank hot process & epoxy powder coated

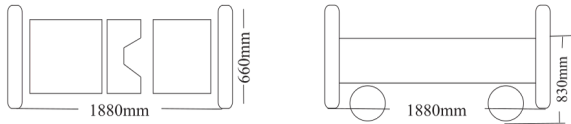

BE - 5180

DELIVERY BED STAINLESS STEEL

- Three section top.
- Steel Tubular frame work.
- Back rest operated on ratchet arrangement.
- Trendelenburg adjusted by handle operated on screw mechanism.
- Leg section can be telescoped under Back rest for lithotomic position.
- Pair of upholstered lithotomic Crutches mounted on S.S. Rods.
- Three side detachable S.S. Rail.
- Complete S.S. finish met.

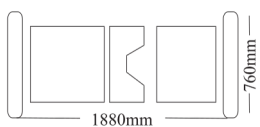

BE - 5152

ELITE SURGENTS

RECOVERY TROLLEY

With Double Hydraulic Pump





BE - 7110

- Frame made of rectangular/round CRCA pipes & sheets four section.
- Radiolucent top with X-Ray cassette holder.
- Backrest adjustable via pneumatic pump up to 65° Height adjustable & Trendelenburg / reverse
- Trendelenburg positions can be achieved by using the dual column based hydraulic pump.
- Knee rest achieved by both ratchet mechanism the mechanism at the foot end.
- Provided with 200 mm centrally locking mechanism castor wheels for ease of mobility.
- Provision IV Rods at both ends , Collapsible type SS side safety rails Dual sided push handle with heavy PVC cushioning.

- Protective Dust Free base cover with oxygen cylinder holder.
- 4 corner is provided with protective bumpers.

Overall dimension:

- Backrest: 0-65
- Knee rest: 0-35
- Trendelenburg 0-20
- Reverse Trendelenburg: 0-20
- Maximum height 900 mm
- Minimum height 600 mm
- All metal components are pre-treated and epoxy powder coated.
- Provided with suitable high-density PU foam.

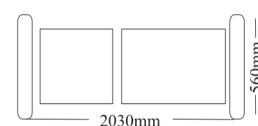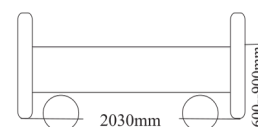

ELITE SURGENTS




EMERGENCY RECOVERY TROLLEY



BE - 2160



- Two section top.
- Height adjusted by foot operated hydraulic pump.
- X-Ray permeable removable stretcher.
- Back rest raised on ratchet.
- Trendelenburg / Reverse-Trendelenburg operated on gas spring.
- 200mm Dia. Non rusting castor two with breaks.
- Complete with corner buffers.
- Sliding x-ray cassette holder.
- Accessories tray.
- Oxygen cylinder arrangement.
- S.S. telescope I.V. Rod.
- Swing away side rails.
- Foam mattress with rexine cover suitable for emergency & recovery trolley.
- Finish pretested in 11 tank hot process & epoxy powder coated.

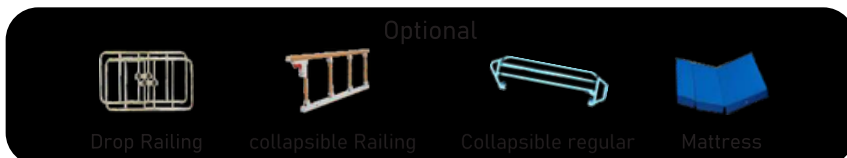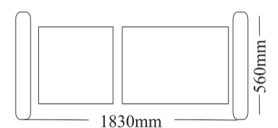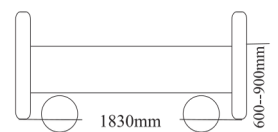

ELITE SURGENTS



TRANSFER STRETCHER RECOVERY



BE - 2152

- Two section top. Back rest raised manually pneumatic.
- Single crank system, hand rocker system can adjust height of stretcher.
- Frame is made by aluminum alloy; the surface is made by PE material.
- 200mm Dia. Non rusting castor two with breaks.
- Complete with corner buffers.
- Oxygen cylinder arrangement.
- S.S. telescope I.V. Rod.
- Automatic lifting guard rail made by PE, safe and reliable and can be fixed.
- Foam mattress with rexine cover suitable for emergency & recovery trolley.
- Finish pretested in 11 tank hot process & epoxy powder coated.
- Optional Four wheels adopt central Control system, which is stable and reliable.


CRASH CART (STANDARD)

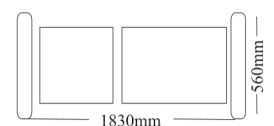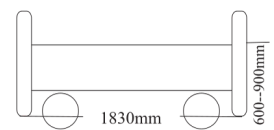

STRETCHER ON TROLLEY

Approximate Size : L 2140 X W 570 X H 820 mm

- Tubular frame work mounted on 150mm Dia. Castor Optional 200m Dia.
- Removable aluminum /Painter MS stretcher top supported with steel tubular frame.
- Mounted with swing away S.S. side rails, oxygen arrangement (Optional).
- Saline rod with saline nobe.
- Finish pretested in 11 tank hot process & epoxy powder coated.

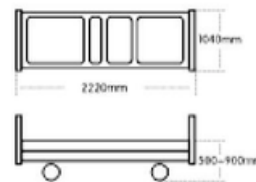

BE - 2120

STRETCHER ON TROLLEY S.S

Approximate Size : L 2140 X W 570 X H 820 mm

- S.S frame work, strecher with adjustable back rest.
- 150mm Castor,2 with breaks. (Optional 200mm Dia.)
- Mounted with swing away S.S. side rails, oxygen arrangement & a saline rod with saline nob.




BE -2128

ELITE SURGENTS

STRETCHER ON TROLLEY REGULAR

Specification:

- Frame work made of 1.25" x 16G vertical and 1" x 18G horizontal CRC tubes.
- Trolley mounted on 150 mm Dia. Castor.
- Removable stretcher top made of M.S. Sheet with S.S. handle.
- Finish pretested in 11 tank hot process & epoxy powder coated.

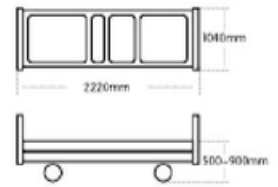

BE - 2113

STRETCHER ON TROLLEY REGULAR

Approximate Size : L 1950 X W 570X H 820 mm



BE - 2136

Optional (Cost-Extra)

- SS Tubular frame work mounted on 150mm Dia. Castor. & Two big wheel.
- Removable aluminum or stainless steel stretcher top supported with steel tubular frame
- Mounted with swing away S.S. side rails spring loaded.
- Oxygen cylinder mounting bracket.
- Saline rod with saline knobe.

CRASH CART JUMBO

Approximate Size : L 960 X W 500 X H 1545 mm

- Complete SS tubular frame work two molded Box with lockable twelve drawers.
- 2nos. handout bins at eye level.
- Provision to hold oxygen slender made of M.S.
- Provided with S.S. saline rod and corner buffers.
- One wooden board.
- 125mm Dia Castor two with breaks & two without breaks.



BE - 4052

CRASH CART DELUX

Approximate Size : L 960 X W 500 X H 1545 mm

- Complete SS tubular frame work two molded Box with lockable six drawers.
- 6 nos. handout bins at eye level.
- Provision to hold oxygen cylinder made of s.s..
- Provided with S.S. saline rod and corner buffers
- One wooden board.
- 125mm Dia Castor two with breaks & two without breaks.



BE - 4040

CRASH CART DELUX LARGE

Approximate Size : L 960 X W 500 X H 1545 mm

- Complete SS tubular frame work two molded Box with lockable three drawers.
- 6 nos. handout bins at eye level.
- Provided with S.S. Saline rod and corner buffers.
- 100mm Dia Indian Castor two with breaks & two without breaks.



BE - 4036

ELITE SURGENTS

MEDICINE TROLLEY

Approximate Size : L 750X W 380X H930 mm

Specification :

- Overall Approx. Size – 750mm L X 380mm W X 930mm H.
- Six molded drawers.
- Two drawers with utility container.
- One S.S. tray on top.
- One S.S. detachable tray downside.
- Tubular frame work fitted with 100mm Dia. Castor.
- Finish pretested in 11 tank hot process & epoxy powder coated.



BE - 4020

MEDICINE TROLLEY JUMBO

Approximate Size : L 750X W 380X H930 mm

- Twelve molded drawers.
- One S.S. Tray on top.
- Tubular frame work fitted with 100mm Dia. Castor.
- Finish pretested in 11 tank hot process & epoxy powder coated.

MEDICINE TROLLEY



BE - 4032

MEDICINE TROLLEY LUXURY

Approximate Size : L 800X W 490X H 910 mm

- Be suitable for sickroom nursing.
- Multiple-purpose drawers : enclosed type, lockable.
- Adjusted medicine boxes in every drawer.
- Polyurethane noiseless castors, two of them with brakes.
- Easy to discharge



BE - 4110

ELITE SURGENTS

EMERGENCY TROLLEY (LUXURY)

Approximate Size : 850 X 520 X 950 mm

Specification :

- Designed to manage a first-aid patient in emergency Easy to knock down.
 - Economic designed push-handle and efficient structure. Pull-out sliding shelf improves efficiency of space application. Total lock key system.
 - Upgraded efficiency of storing and mobility.
 - Each drawer has ABS basket with well organizing divide.
- Optional:-
- CPR Board.
 - Oxygen Tank Holder.
 - Needle Disposal Holder.



BE - 4124

ANESTHESIA TROLLEY (LUXURY)

Approximate Size : L 800 X W490 X H 1490 mm



BE - 4135

- The boards on the two sides and the drawers les are made of ABS.
 - Four transparent boxes at the upper part of trolley can store medicine and tiny medical apparatuses conveniently.
 - Two concealed auxiliary working boards under tabletop. Enlarge the working space.
 - Five drawers with lock can store different kinds of medicine and others.
 - Waste bins are fixed on two sides.
 - Polyurethane nosiness castors, two fo them with brakes.
- Optional
- CPR Board.
 - Oxygen Tank Holder.
 - Needle Disposal Holder.

OT DRUG TROLLEY

Approximate Size : 670mm L X 460mm W X 1530mm H

- Complete S.S. Structure.
- Having 24 nos. small hand bins.
- Having 12 nos. big hand bins.
- One tray on top.
- 25mm Dia. Castors two with breaks & two without Breaks.
- S.S. finish matt.



BE - 4024



BE - 4048

OT MONITOR TROLLEY S.S.

Approximate Size : L 800 X W 690 X H 1570 mm

BE - 4032

OT MONITOR TROLLEY PC

BE-4032 Model specification same as 4048 but powder coated instead of stainless steel

- Top shelves fixed top approx size - 560mm LX 460mm W.
- Other shelf size - 510mm LX 460mm W.
- Shelf adjustments 40mm suitable for storing monitor, Printer & stabilizer etc.
- Four shelf M.S. drawer at bottom
- 125mm Dia Castor two with breaks & two without breaks.
- Having 5/15 Ampere board.
- Having 3 pin plug electric board.
- S.S. saline rod & powder coated oxygen cylinder arrangement.
- Finish pretested in 11 tank hot process & epoxy powder coated.

ELITE SURGENTS

WARD DRESSING TROLLEY

Approximate Size : L 1000 X W 510 X H 1000 mm

- Stainless steel tubular frame work mounted on 100mm Dia. castor.
- Upper S.S. top fitted with four side railing.
- Having S.S. bowl & bucket.
- S.S. finish matt.



BE - 4019

INSTRUMENT TROLLEY (WITH RAILING)

Approximate Size : L 1000 X W 510 X H 1000 mm

- S.S. tubular frame work Three selves.
- 100mm Dia. Castors.
- Upper top fitted with three side S.S. Railing
- Down side fix top with railing.
- S.S. finish matt.

OPTIONAL SIZES :

(A) 690mm L X 460mm W X 900mm H (BE - 4017)

(B) 1070mm L X 610mm W X 900mm H (BE - 4024)



BE - 4017/4024

INSTRUMENT TROLLEY

Approximate Size : L 1000 X W 510 X H 1000 mm

- S.S. tubular frame work.
- 100mm Dia. Castors.
- Upper top fitted with three side S.S. Railing.
- Down side fix top with railing.
- S.S. finish matt.

SIZE

(A) 690mm L X 460mm W X 900mm H (BE-4013)

(B) 1070mm L X 610mm W X 900mm H (BE-4018)



BE - 4013/4018

ELITE SURGENTS

WARD DRESSING TROLLEY (DELUXE)

Approximate Size : L 1000 X W 510 X H 1000 mm

- Stainless steel tubular frame work mounted on 100mm Dia. castor.
- Upper S.S. top fitted with four side railing.
- Having S.S. bowl & bucket.
- S.S. finish matt.



BE - 4028
BE - 7110

E.C.G. TROLLEY

Approximate Size : W 355 X D 480 X H 655 mm

- 3 trays & 50mm Dia Castor, Cable Hanger
- Pre-treated & Epoxy powder Coated.
- Available in full Stainless Steel / Epoxy powder Coated frame with S.S top.



BE - 4009

SERVICE TROLLEY (WITH RAILING)

1070mm L X 610mm W X 900mm H

- S.S. tubular frame work.
- 100mm Dia. Castors.
- Three selves with side S.S. Railing.
- One big drawer below top.
- S.S. finish matt.



BE - 4134

ELITE SURGENTS

BABY CRADLE

Approximate Size : L 900 X W 375 X H 975 mm

- Along with two of hooks for obtaining tilt position.
- Stand frame work made of M.S. tubular pipe.
- Legs fitted with PVC stumps.
- Finish pre-treated and epoxy powder coated.



BE - 1105



BE - 1113

BABY BASSINET

Approximate Size : L 900 X W 375 X H 975 mm

- Preprex transparent crib with mattress.
- Trendlenburg /Reverse trendlenburg adjustable manually.
- S.S. Tubular frame work fitted with 50mm Dia. Castor I.V. Rod.



BABY BASSINET (WITH UTILITY BOX)

Approximate Size: L 900 X W 375 X H 975 mm

- Preprex transparent crib with mattress.
- Trendlenburg /Reverse trendlenburg adjustable manually
- S.S. Tubular frame work fitted with 50mm Dia. Castor, I.V. Rod

ELITE SURGENTS

SOILED LINEN TROLLEY

Approximate Size 910mm L X 100 Dia mm with Canvas Bag

- 100mm Dia. Swiveling Castors With plastic coated canvas bag
- S.S. finish matt.



BE -4015/BE-4013

NURSING CART S.S.

Approximate Size : L 900 X W 500 X H 740 mm

- All stainless steel structure.
- Fold- deck with silent wheels and dirt bags.
- 100mm Dia. Swiveling Castors.
- S.S. finish matt.



**BE -4015 STAINLESS STEEL
BE-4013 POWDERCOATED**



BE -114

SOILED LINEN TROLLEY

Approximate Size 910mm L X 100 Dia mm
with Plastic Bucket

Specification :

- Push handle at one end.
- S.S. frame work on 10 cm castors.
- Superior quality plastic bucket.
- Complete in S.S. Frame.

ELITE SURGENTS

WASH BASIN STAND

Approximate Size :
860mm H X 350 mm S.S. Bowl



BE -0150



BE -0130



BE -0124

- S.S. tubular frame work.
- 50mm Dia. Castors
- S.S. finish matt

KICK BUCKET – WITH CASTOR

Approximate Size :
1260 to 2060 mm H



BE -0140

- SS bucket fitted in mobile stand
- 50mm Dia. Castors
- S.S. finish matt

FOUR FOLD SCREEN

Approximate Size :
L 1680 X H 1680 mm

BE -0160



- M.S. Tubular frame work fitted with 50mm Dia. Castors
- Each span 610mm wide
- Finish pre-treated and epoxy powder coated.

THREE FOLD SCREEN

Approximate Size :
L 2450 X H 1680 mm

BE -0152



- M.S. Tubular frame work fitted with 50mm Dia. Castors.
- Each span 610mm wide
- Finish pre-treated and epoxy powder coated.

ELITE SURGENTS

I.V. STAND DIFFERENT MODELS

Approximate Size : 1350 mm to 2150 mm H

- Five pronged base fitted with 50mm castors.
- 12 mm S.S. Adjustable I.V. Rod with 2/4 hooks
- (A) M.S pipe with M.S. Base (BE-0016)
- (B) S.S. pipe with ABS Base (BE-0044)
- (C) S.S. pipe with S.S. Base (BE-0036)



BE-0016 / BE-0044 / BE-0036

OXYGEN TROLLEY



BE -0160

- Suitable for 762mm height gas cylinder
- Tubular frame work fitted with two 100mm Dia. Rubber wheels.
- Finish pretested in 11 tank hot process & epoxy powder coated.
- Big Oxygen Trolley



BE -0180

ELITE SURGENTS

ELECTRIC WHEEL CHAIR

- Comfortable driving with ergonomic design which release fatigue.
- Powerful efficient energy-saving water, high-precision gearbox, fast and stable starting, 5 speed setting.
- Triple protection electromagnetic brake and gear self-lock protection.

Load capacity	- 100kg
Enduranced mileage	- 20km
Maximum Speed	- 6 km /hr
Battery	- Lithium Battery
Motor Power	- 130W



BE -0312

WHEEL CHAIR

- Seat and Back with Fixed Cushioned Arm Rests.
- Front with 6" and Rear 12" Heavy Duty Solid Wheels with Brakes.
- Stainless steel/ steel frame with fixed arm and foalding footrest.(Optinal) with safety belt.
- Upholstery: Rexine with cushioned sheet & back Seat
- Floor Height: 19 inches ,Back Height: 18 inches.



BE -0311

FOLDING WHEEL CHAIR

- Chrome plated steel frame with fixed arm & footrest
- Seat width: 46 cms(approx); Max load bearing: 100 kgs(approx) Out to out width in open position: 26 inches.
- Total width in closing position: 9 inches
- Wheel Size: 8 inches ,Rear Wheel Size: 24 inches, Front Seat to Floor Height: 19 inches.
- Back Height : 18 inches, Upholstery: Rexine ,Wheel Quality: Solid Mag Wheels.



ELITE SURGENTS



ADJUSTABLE WALKER



FOLDABLE SHOWER SEAT



**ADJUSTABLE
COMMODE CHAIR**



WALKING STICK



COMMODE STOOL



UNDER ARM CRUTCHES

SURGICAL INSTRUMENT CABINET

Approximate Size : 610mm L X 460mm W X 1600 mm H

- Made from machine pressed CRCA sheet.
- Front door with glass.
- Three way lock system.
- Five glass shelves adjustable making six compartment.
- Finish pretested in 11 tank hot process & epoxy powder coated.



BE - C120

MEDICINE CABINET

Approximate Size : 960mm L X 400mm W X 1750mm H

- Complete stainless steel framework.
- Two Front doors with glass.
- Three way lock system.
- Five S.S. shelves adjustable making six compartment.



BE - C128

ELITE SURGENTS

WAITING AREA CHAIR (DELUXE)



BE - 1001



BE - 1002

WAITING AREA CHAIR (REGULAR)

- Complete S.S. Frame/moulded /painted MS.
- Made of High Density foam.
- Modular 2 seater to onward extandble.



BE - 1003



ELITE SURGENTS

WAITING AREA CHAIR



ANESTHESIA MACHINE

BE - L535



MINI

BE - L545



MAJOR

BE - L555



WORK STATION

Description :

Anesthesia Machine or Boyle's apparatus Construction: Tubular, rigid, electrostatically stainless steel / power coated . Fitted with Four large diameter anti-static castor wheels. Extended rear platform for two 10 liter water capacity cylinders Table Top: Stainless Steel (600 x360mm) Pressure Gauges: large diameter (63mm) two each for oxygen and nitrous oxide, fitted at convenient angle for high visibility. Regulators: Designed for higher efficiency & reliability; two each for oxygen & N₂O Rota meters: Long (230mm) rotating bobbing flow meters calibrated in Double scale for accuracy and clarity in reading. Oxygen: 100ml/min to 8 liters/ min Nitrous oxide: 200ml/min to 12 liters/min Oxygen Failure warning device (OFWD): Pneumatic device which activates audible alarm (for a minimum of 7 sec.) Vaporizer: One Goldman Vaporizer for Halothane supplied as standard. Space for one or more Vaporizer of choice. Ether vaporizes at extra cost. Non-Return cum Pressure relief valve: Minimizes risk of backflow of gases. Blows off when pressure exceeds 200cm of water column. Breathing Attachment: Standard Magill's circuit with change over unit (open circuit to closed circuit and vice versa).

Accessories :

Two Built in self-sealing Schrader type oxygen outlet for driving ventilators etc.

LED PHOTOTHERAPY

Approximate Size : L 480 X W 470 X H 755 mm

Specification:-

This has been achieved by exposing the infant to bright light (approximately 4.5 micro watts/sq cm/nm) in the range of 420-480 nm wave length by use of conventional phototherapy unit.

- LED 12 hi power LEDs(blue) (white LED optional)
- Irradiance $>42 \text{ mw/cm}^2/\text{nm}$ at 30cm
- Light source lifetime minimum 25,000hrs.
- Less than 10% change in illumination after 25,000hrs (irradiance)
- Wavelength 420-480 nm
- Variation in intensity for 6 hours $<10\%$
- Effective area 50 cm X 30 cm.
- LCD Digital Timer for lamp usage hours and patient exposure.
- Input voltage 100-240 V, 50-60Hz
- Dimensions 15"(L)X10"(W)height adjustable Min. 1270mm to 1750mm

OPTIONAL : DOUBLE SURFACE PHOTO THERAPY UNIT

It is a combination of overhead phototherapy Unit and undersurface Phototherapy with Baby Bassinet.



BE - L535

RADIANT WARMER

Approximate Size : L 480 X W 470 X H 755 mm

- Control Modes Skin/Air/Manual (LCD).
- 1" Bright FND, Skin Temp. Display.
- 1" Bright FND, Air Temp. Display.
- LED Bar heater output % Display.
- Set Temp. display on FND/LCD by mode selection.
- All modes display on LCD.
- Timer display on LCD.
- All safety alarms, visual display on LCD.
- Skin temp. high ($>0.5\text{c}$ of set temp.).
- Skin temp. low ($<0.5\text{c}$ of set temp.).
- Skin temp. over range ($>38\text{C}$).
- Skin temp. under range ($<34\text{C}$).
- Skin sensor fail alarm.
- Air mode/safety alarms & high temp. cut off/power Failure alarm.
- Light source 50 Watts bulb to examine baby.



BE - B300

VERTICAL HIGH PRESSURE STEAM STERILIZER AUTOCLAVE

(TRIPPLE WALLED)

- High pressure water steam electrically heated vertical sterilizer used for sterilizing of surgical instruments, Dressing materials, Linen, Rubber, Plastic material, Injection liquids by means of steam under pressure of 15 to 20 PSI. (Adjustable)
- Tripple chamber with inner chamber and steam jacket.
- All Sterilizers are hydraulically tested upto 2.5 times of working pressure.
- Outer chamber made of stainless steel sheet reinforce with M.S. Sheet. Lid is made of thick stainless steel plate single piece and closed not allow any leakage, fitted with double safety valve, Water level indicator, water inlet and drain valves.
- Supplied complete with cord and plug but without dressing bins, To work on 220 volts, Single Ph, 50 Hz, Ac supply.



BE - S1170(RADIAL)

- * BE-1200(A) - 12" x 22" (40 Liters)Load 3 KW
- * BE-1200 (B) - 16" x 24" (75 Liters)Load 4.5 KW (BE-S090)
- * BE-1200 (C) - 18" x 30" (75 Liters)Load 8KW

OPTIONAL ACCESSORIES :

- Automatic low water alarm / cutoff
- Digital temperature indicator.
- Mechanical timer 60 min.
- Pressure control switch
- Dial type analog temperature gauge.
- Mechanical timer with alarm system



BE - S090(WING NUT)

ELITE SURGENTS

HORIZONTAL HIGH PRESSURE STEAM STERILIZER AUTOCLAVE

Designed for steam sterilization by gravity air removal at 121 degree Celsius with fast or slow exhaust option for sterilizing container, ampoules, vials, bottles, test tubes, rubber articles of labs, hospitals and industries

- Working pressure up to 1.36 kg/cm² (20 P.S.I.G.) Vacuum up to 250 mm (10") of Hg.
- Construction S.S. 316 or S.S 304 chamber and jacket of boiler grade steel with reinforcements.
- Door inner construction of S.S. 304 grade , Radial Locking System, with Silicon Gasket.
- Multi-port valve operation available Or Digital microprocessor Control with solenoid valve.
- Large capacity units with direct steam operation have diaphragm Type PRV, Small capacity units with steam generators with pressure switch with low water cut off system.



BE - H400

HORIZONTAL HIGH PRESSURE STEAM STERILIZER AUTOCLAVE

AVAILABLE IN FOLLOWING SIZES :

* BE-1400(A) - 16" x 24" (75 Liters)

Dia	Depth	Load
-----	-------	------

400mm	600mm	18kw
-------	-------	------

* BE-1400 (B) - 20" x 48" (220 Liters)

Dia	Depth	Load
-----	-------	------

500mm	1200mm	12kw
-------	--------	------

* BE-1400 (C) - 20" x 36" (165 Liters)

Dia	Depth	Load
-----	-------	------

500mm	900mm	12kw
-------	-------	------

BE - H500 (Digital)

Specification same as above but equipped with

OPTIONAL ACCESSORIES :

- Automatic low water alarm / cutoff.
- Pressure control switch.
- Digital temperature indicator.
- Dial type analog temperature gauge.
- Digital timer along with auto drying.

ELITE SURGENTS

AUTOCLAVE TEAM STERILIZER

- High pressure water steam electrically heated vertical sterilizer used for sterilizing of surgical instruments, Dressing materials, Linen, Rubber, Plastic material, Injection liquids by means of steam under pressure of 15 to 20 PSI.
- Double chamber autoclave.
- All Sterilizers are hydraulically tested upto 2.5 times of working pressure.
- Outer chamber made of stainless steel sheet reinforce with M.S. Sheet.
- Lid is made of thick stainless steel plate single piece and closed not allow any leakage, fitted with double safety value, Water level indicator, water inlet and drain valves.
- Supplied complete with cord and plug but without dressing bins, To work on 220 volts, Single Ph, 50 Hz, Ac supply.



BE - A056

Optional Accessories :

- Automatic low water alarm / cutoff
- Pressure control switch
- Digital temperature indicator.
- Dial type analog temperature gauge.
- Mechanical timer 60 min.
- Mechanical timer with alarm system.

BE-1100(A) - 12" x 22" (40 Liters) (BE-A032)

BE-1100 (B) - 16" x 24" (75 Liters) (BE-A056)

BE-1100 (C) - 18" x 30" (120 Liters) (BE-A070)



BE - S060

HIGH PRESSURE STEAM STERILIZER AUTOCLAVE

- High pressure water steam electrically heated vertical sterilizer used for sterilizing of surgical instruments, Dressing materials, Linen, Rubber, Plastic material, Injection liquids by means of steam under pressure of 15 to 20 PSI.
- Tripple chamber with inner chamber and steam jacket.
- All Sterilizers are hydraulically tested upto 2.5 times of working pressure.
- Outer chamber made of stainless steel sheet reinforce with M.S. Sheet.
- Lid is made of thick stainless steel plate single piece and closed not allow any leakage, fitted with double safety value, Water level indicator, water inlet and drain valves.
- Supplied complete with cord and plug but without dressing bins, To work on 220 volts, Single Ph, 50 Hz, Ac supply.

BE-1200(A) - 12" x 22" (40 Liters) Load 3 KW (BE-S060)

BE-1200 (B) - 16" x 24" (75 Liters) Load 4.5 KW (BE-S090)

BE-1200 (C) - 18" x 30" (75 Liters) Load 8KW BE (BE-S120)

ELITE SURGENTS

AUTOCLAVE /STEAM STERILIZER

Designed for general purpose sterilization jobs at dental clinics, nursing homes and hospitals etc. Available from 20/25 liters of capacities. Constructed with heavy gauge aluminum or stainless steel material (optional). The chamber generates steam pressure 15 psi to 18psi under working temperature 121°C to 140°C.

BE-1212S - 12" x 12" (20 Liters) Stainless Steel BE-A1011.
BE-1215S - 12" x 15" (25 Liters) Stainless Steel BE-A1016.



BE - A1011/A1016

STEAM STERILIZER /AUTOCLAVE

- Portable design for low bench space
- No specific installation required.
- Aluminum or stainless steel construction.
- Over pressure protection.
- ISI marked gasket and heating element.
- 20 to 25 liters of chamber capacities.
- Simple to use, just plug and operate.
- Fast sterilization approx. 20 min.
- Heat resistant handles.
- Full range of optional accessories.

BE-1312A - 12" x 12" (20 Liters) Aluminium (BE-A1070)
BE-1312S - 12" x 12" (20 Liters) Stainless Steel (BE-A0120)
BE-1315A - 12" x 15" (25 Liters) Aluminium (BE-A1090)
BE-1315S - 12" x 15" (25 Liters) Stainless Steel (BE-A0140)



**(BE-A1070) (BE-A0120)
(BE-A1090)(BE-A0140)**

ELITE SURGENTS

MEDICAL SUCTION MACHINE

These BASIL pumps are the latest innovation in high-vacuum suction. The heavy-duty piston-cylinder system creates whisper-quiet and robust operation. The pumps offer a strong alternative to wall vacuum, as the independent vacuum avoids overflow into wall systems and provides a smooth, consistent, and reliable vacuum level

SUCTION ABS



BE-AB25 | BE-AB50

- Powerful drive unit is whisper quiet at < 40 dB(A) 1 , thus reducing distraction during surgery.
- Increased performance and faster suctioning with the Dominant Flex Different models from 25L to 45l/min.
- Self-lubricating pumps for Uniform pressure flow.
- Shock proof, Light Weight ABS (Plastic) Cabinet.
- Non-collapsible Suction Tubing vacuum -720+10 mmHg.
- Air displacement: 40~45 LPM/25 LPM.
- Workable on: - 220~230 V AC, 50 Hz, 1 Phase.
- Heavy duty Castors, Calibrated Vacuum Gauge: 76 mm.
- Polycarbonate jars with overflow safety: 2X 2.0 Liter.
- Packing Size 36X50 X6 5H CM.

SUCTION METAL



BE-M25 | BE-M50

- M.S. cabinet epoxy powder coated with ss top , CE Marked, ISO:9000 & 13485
- Fitted with 1/4 H.P Or 1/2 H.P.. electric motor with oil immersed Vacuum pump
- 2x1500ml glass graduated suction jars with rubber lids.
- Vacuum gauge, vacuum control valve, overflow cut off device.
- Power indicator & patient suction tubing.
- Mounted on 2x100mm rubber wheels.
- Noise level of suction Machine: < 65 dB,
- Electrical Requirement: - 220~230 V AC, 50 Hz, 1 Phase.

ELITE SURGENTS

These BASIL pumps are the latest innovation in high-vacuum suction. The heavy-duty piston-cylinder system creates whisper-quiet and robust operation. The pumps offer a strong alternative to wall vacuum, as the independent vacuum avoids overflow into wall systems and provides a smooth, consistent, and reliable vacuum level

SUCTION REGULAR

- Oil free pump.
- No need to add oil for maintenance.
- No positive pressure during using.
- Reservoir capacity: 2500mL/pc, 2pieces.
- Powerful drive unit is whisper quiet at < 40 dB(A) 1 , thus reducing distraction during surgery.
- Shock proof, Light Weight ABS (Plastic) Cum Metal Cabinet
- Non-collapsible Suction Tubing.
- Heavy duty Castors, Calibrated Vacuum Gauge: 76 mm
- Polycarbonate jars with overflow safety: 2 X 2.0 L
- Packing Size 36 X 50 X 6 5H CM
- ISI & CE Marked, ISO: 13485,



BE-AP15

SUCTION PORTABLE

(OPTIONAL) SUCTION IS WITH BATTERY BACK UP FOR 30 MIN

Technical Performances

- High Vacuum, low flow Hz \pm 2%, , rechargeable battery backup.
- Power Supply: AC220V \pm 10%, 50
- Input power: 90VA .
- Limit negative pressure: \geq 0.070Mpa(600mmHg)
- Negative pressure regulating range: 0.02MPa~limit negative pressure.
- Suction rate: \geq 18L/min .
- Liquid holder poly carbonate: 600mL/pc, 2pc
- Sound level: \leq 65dB(A)



BE-AP18

Portable suction apparatus designed abroad is a new generation of oil free lubrication suction device, which is suitable for use by the New born Baby , patient who has difficulty in phlegm removal . As well as for aspirating such liquid as pus and blood during the clinical practice. Very use ful the Pediatric, Ambulance, emergency room, operation room, and for nursing in sickroom and home health care.

ELITE SURGENTS

BE - A1011/A1016



OT light is multicolour option with high brightness for long surgical procedure. This light is easily mounted on the ceiling of operation room which gives homogenous illumination. It can also be mounted on wall with four screws. This light supports angular, axial and radial movement. Features such as high energy efficiency, adjustable light head and flexible arm movement. The stable arm system of this double dome led OT light offers adjustment of dome at different height and angle.



- Intensity: 1,380,000 x 2 Lux
- Depth Lumination: 10-15cm
- Colour Index : 91 Ra
- LED Life : >40k Hrs.
- Power Supply: 220V/50Hz Ac
- Spot Diameter: 100- 150 mm
- Colour Temp.: 3800-5200K
- Focusing: Manual
- Intensity Control: 10-100 Digital
- Power: 100 Watt x 2

ELITE SURGENTS

BE - A1070/A0190



OT light is multicolour option with high brightness for long surgical procedure. This light is easily mounted on the ceiling of operation room which gives homogenous illumination. It can also be mounted on wall with four screws. This light supports angular, axial and radial movement. Features such as high energy efficiency, adjustable light head and flexible arm movement. The stable arm system of this double dome led OT light offers adjustment of dome at different height and angle.



ELITE SURGENTS

BE - A0120/A0140



Number of Domes	3,4,5&6
Light Source Type	LED
Positioning	Ceiling Mounted, Mobile, Wall-Mounted
Brightness (Lux)	130000
Colour Specification	Multi Colour
Movement	Angular,Axial,Radial
Lighting Colour	Cool White, Warm White
Spot Size	100-150 CMS

ELITE SURGENTS

WE ALSO DEALS IN



5 Para Monitor



3 Para Monitor



Cautery Machine



Syringe Pump



Syringe Pump

ELITE SURGENTS

HOSPITAL HOLLOWARES



BE - 801
Forceps jar



BE - 802
Urinal Pot (S.S.) Male/female



BE - 803
Enema Can



BE - 804
Kidney tray



BE - 805
Bed pan (S.S.) Male/female



BE - 806
Seamless Dressing Drum (S.S.)



BE - 807
Bucket



BE - 808
S.S. Bowls



BE - 809
Instrument trays



BE - 810
Sputum mug



BE - 811
Basin (S.S.)

MATERIALS AND PROCESS

- All S.S. material is of 304 Grade.
- All CRCA M.S. Sheets directly supplied from **TATA STEEL**.
- All S.S. material polished with **Matt Polish 3M (USA)**.
- Castor wheels are from TENTE-Germany & Jaisons (ISO Company)
- Raw material (M.S.) are pre-treated with 11 tank Hot Chemical Process from **Henkal**

Chembond Surface Technologies Ltd.

- Powder Coating is done through spray gun & its testing includes:
- Bend Test.
- 100KGS. Impact Test.
- Scratch Test.
- 500 HRS. Salt Spray Test.
- Guaranteed Epoxy Powder Coating.

FACTORY, OFFICE & DISPLAY

Naini, Prayagraj, U.P.
Pincode- 211008
Ph.:+91 7068840635, 8112455636
Email: elitesurgents0010@gmail.com

Contact: +91 7068840635 | +91 8112455636
Address: 65, Chalak Naini, Prayagraj, Uttar Pradesh
Email: elitesurgents0010@gmail.com



ELITE SURGENTS

Legacy of Excellence

Contact: +91 7068840635 | +91 8112455636

Address: 65, Chalak Naini, Prayagraj, Uttar Pradesh

Email: elitesurgents0010@gmail.com

